


tivoli mist is available in tile and plank






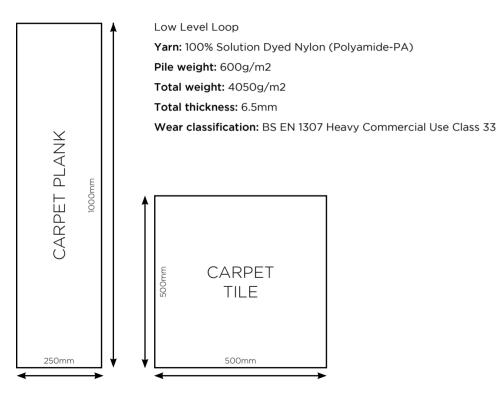

tivoli mist offers a flexible range of commercial carpet tiles, designed to provide creativity, colour and individuality.

With colour pairings that blend seamlessly together, **tivoli mist** affords the possibility of transitioning from one zoned area to another without the use of hard lines.

Made using 100% solution dyed nylon and achieving class 33 heavy commercial use in technical testing, the product has the durability of the core tivoli range, with the added diversity of a multitude of installation design options.

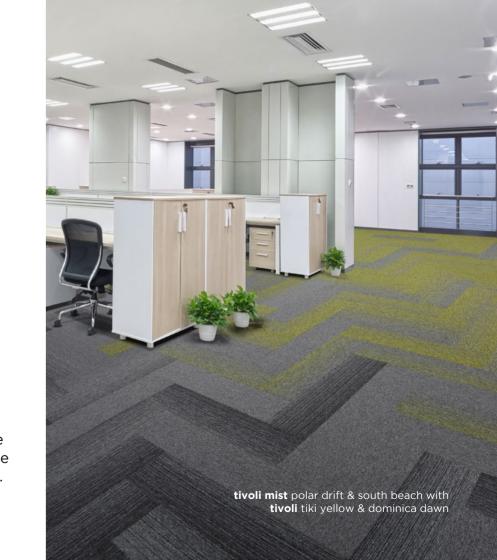



Inspired by the flexible and open plan nature of interior spaces today, **tivoli mist** offers endless possibilities of an all-over carpet tile product.

All colour components that make up the **tivoli mist** range are available as solid **tivoli** colours as well as the **tivoli mist** transition tile design. With the added benefit of being available in both tile and plank size options, the range offers endless design possibilities for the creation of bespoke interior floor schemes.



tivoli mist - icelandic isle **32710 32910** LRV: Y 13.21 - L 45.01



tivoli mist - ocean drive **32703 32903** LRV: Y 13.11 - L 41.16



tivoli mist - havana town **32704 32904** LRV: Y 8.80 - L 36.93



tivoli mist - polar drift **32712 32912** LRV: Y 9.99 - L 37.50



tivoli mist - turtle bay **32705 32905** LRV: Y 10.17 - L 37.42



tivoli mist - nordic fjord **32711 32911** LRV: Y 7.47 - L 33.95




tivoli mist - baffin island **32707 32907** IRV: Y 7.06 - I 31.17



tivoli mist - south beach **32701 32901** LRV: Y 14.27 - L 44.89



tivoli mist - bergen city **32708 32908** LRV: Y 4.69 - L 24.36



tivoli mist - galapagos bay **32713 32913** LRV: Y 5.75 - L 27.32



tivoli mist - palm springs **# 32702 # 32902** LRV: Y 8.81 - L 35.77

technical specifications

Product Name Product Description Pile Yarn Description Tile Dimensions Pile Yarn Weight Total Weight Pile Height Total Thickness Gauge/ends per 10cm Tufts per m2 / Pile Density **Backing Description**

Wear Classification Luxury Rating Class Flammability

Thermal Resistance Castor Chair Rating

Hexapod Static Loading **Dynamic Loading Body Voltage Test**

Colour Fastness To Light Colour Fastness To Shampoo

Sound Absorption Coefficient Reduction in Impact Noise

Reduction in Impact Noise at 1000Hz Number Of Tiles/Planks Per Box

Tivoli Mist

Low Level Loop

100% Solution Dyed Nylon (Polyamide-PA) 50 cm x 50 cm, 25 cm x 100 cm (planks)

600g/m² 4050q/m² 4.0mm 6.5mm

1/10th gauge 50 stitches

196,500/m²

Accummen™, 75% recycled

BS EN 1307 Heavy Commercial Use Class 33

LC2

Euroclass Bfl-s1

Tog Rating 0.39; ISO 8302: 0.04 m²K/W BS EN 985 Pass - suitable for continuous use

BS ISO 10361: Method B:2000 3 to 4

BS 4939: 1987 (2003) Recovery >80% (24hrs)

BS ISO 2094: 1999 (2005) Loss <20% (1000 impacts)

BS ISO 6356:2000 <2kV

BS EN ISO 105 - B02 Minimum Grade 6

BS 1006:UK-TB: 1990 Minimum Grade 4-5


BS EN 354:2003


BS EN ISO 10140-3:2010 23dB BS EN ISO 10140-3:2010 35.6dB

20 (5m²)











For best carpet plank installation results we recommend



Herringbone



















tivoli mist baffin island with tivoli antigua steel & st lucia night



Each step we take towards achieving sustainability is evidenced and supported by strict eco-standards, with **burmatex**® product EPD verified by an independent third-party verification of the declaration and data, according to ISO 14025:2006.

burmatex[®]

victoria mills, the green ossett, west yorkshire WF5 OAN united kingdom

tel: +44 (0) 1924 262 525 fax: +44 (0) 1924 280 033

for more information check: www.burmatex.co.uk

email: marketing@burmatex.co.uk

international email: international@burmatex.co.uk





/company/burmatex-limited



@burmatex



/burmatex